

- GENERAL NOTES:
1. NO DIMENSIONS TO BE SCALED.

2. DIMENSIONS TO BE VERIFIED ON SITE BEFORE COMMENCING ANY SITE WORK OR SHOP DRAWINGS.

3. DIMENSIONS ARE TAKEN TO CENTRE LINES OR STRUCTURAL SURFACES AND DO NOT INCLUDE FINISHES EXCEPT WHERE OTHERWISE STATED.

4. THE ARCHITECT IS TO BE NOTIFIED OF ANY DISCREPANCIES BETWEEN THIS DRAWING AND ANY OTHER DRAWING OR CONSTRUCTION DOCUMENTS INCLUDING THOSE ISSUED BY CONSULTANTS AND NOMINATED SUB-CONTRACTORS BEFORE COMMENCING WORK.

5. MINIMUM STRENGTH POF CONCRETE 21Mpa

ISSUED FOR  
MEASUREMENT  
PURPOSES

A

ISSUED FOR STAGE 3 COORDINATION

04.02.22

REV.

DESCRIPTION

DATE

CLIENT

SOUTHERN AFRICAN  
DEVELOPMENT COMMUNITY

JOB TITLE

SADC STANDBY FORCE REGIONAL  
LOGISTICS DEPOT, AT RASESA,  
GABORONE, BOTSWANA,

DWG TITLE

GUARD HOUSE  
WINDOW SCHEDULE

SCALE	AS SHOWN	JOB No.	G649
DATE	JAN 2022	DRAWN BY	KT
REV.	A	CHECKED BY	AM

Project Team:

Architect  
Quantity Surveyor  
Electrical Engineers  
Mechanical Engineers  
Civil Engineers  
Structural Engineers

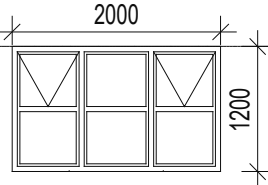

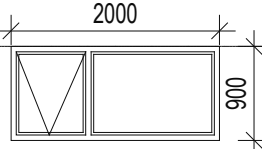


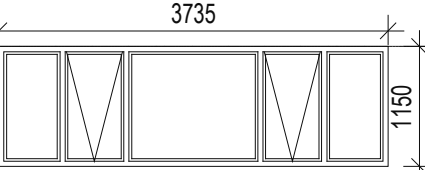


FMA Architects  
Turner & Townsend (Pty) Ltd.  
G4 Consulting Engineers (Pty) Ltd.  
G4 Consulting Engineers (Pty) Ltd.  
Bohokaga Sharrow Botswana (Pty) Ltd.  
Bohokaga Sharrow Botswana (Pty) Ltd.

FMA

FMA ARCHITECTS (PTY) LTD.  
P.O. BOX 201504 BONTLENG  
GABORONE, BOTSWANA.  
TEL: 3959812/3 FAX: 3959814  
E-MAIL: fmagabs@info.bw

DRWG. No.

G649-SADC/ARCH/2/001 / 1-404

WINDOW SCHEDULE																	
	<div>W1</div>		<div>W2</div>		<div>W3</div>		<div>W4</div>		<div>W5</div>		<div>W6</div>		<div>W7</div>		<div>W8</div>		
																	
	WINDOW TYPE	REQUIRED NO	WINDOW TYPE	REQUIRED NO	WINDOW TYPE	REQUIRED NO	WINDOW TYPE	REQUIRED NO	WINDOW TYPE	REQUIRED NO	WINDOW TYPE	REQUIRED NO	WINDOW TYPE	REQUIRED NO	WINDOW TYPE	REQUIRED NO	
	W1	2	W2	2	W3	1	W4	2	W5	4	W6	2	W7	2	W8	1	
WINDOW NUMBERS	W1-01,W1-02		W2-01,W2-02		W3-01		W4-01,W4-02		W5-01,W5-02,W5-03,W5-04		W6-01,W6-02		W7-01,W7-02		W8-01		
WINDOW FRAME	Powdercoated aluminium frame		Powdercoated aluminium frame		Powdercoated aluminium frame		Powdercoated aluminium frame		Powdercoated aluminium frame		Powdercoated aluminium frame		Powdercoated aluminium frame		Powdercoated aluminium frame		
GLAZING	28mm bullet resistant glass. Aluminium mullions to counter centres fitted with speech posts		28mm bullet resistant glass. Aluminium mullions to counter centres fitted with speech posts		28mm bullet resistant glass. Aluminium mullions to counter centres fitted with speech posts		Flush glazing frame with 6.38mm thick solar sheild glass s10		Flush glazing frame with 6.38mm thick solar sheild glass s10		28mm bullet resistant glass. Aluminium mullions to counter centres fitted with speech posts		28mm bullet resistant glass. Aluminium mullions to counter centres fitted with speech posts		28mm bullet resistant glass. Aluminium mullions to counter centres fitted with speech posts		
ACCESORIES	N/A		N/A		N/A		N/A		N/A		N/A		N/A		N/A		

**APPLICABLE STANDARDS**  
The Standard that shall apply in the design, manufacturer and installation of all items in this Schedule shall be **BOS 88:2016 Third Edition** being the "**Glazed aluminium alloy windows and doors for external use - specification**", as published by the Botswana Bureau of Standards.

1. Doors and curtain walls are to be assembled from suitable, approved, 1.8mm thick aluminium profiles.  
2. Windows of standard size are to be assembled from suitable, approved, 1.5mm thick aluminium profiles.  
3. All joint sealing materials shall comply with the standards, and shall be adequate to prevent air and water leakage.  
4. All glass shall comply with safety requirements as specified by the Standards.  
5. All assemblies shall comply with the Safety and Security requirements of the Standards.  
6. All powder coating shall comply with the Standards and must be UV-resistant and scratch resistant to the minimum standard.  
7. **PREVENTION OF THERMAL CRACKS:** The supplier must ensure the prevention of thermal cracks by adequately polishing all edges and applying all other measures required. Contact between glass and metal must be avoided.

**ALL INSTALLATIONS MUST BE TO APPROVED SHOP DRAWINGS.**

1

WINDOW SCHEDULE

1:NTS